


RADIAL DRILL

RF-35

Mini Radial Drill

WORKING CAPACITY

In Mild Steel	Drilling	32mm (1 1/4")
	Face Mill	76mm (3")
	End Mill	20mm (3/4")
(Optional) In Light Alloy	Tapping	16mm (5/8") 32mm (1 1/4")



Optional Accessories
Box Table for RF-35



Stand is Optional

RF-720A

Radial Drill

WORKING CAPACITY

Drilling	Steel	32mm (1 1/4")
	Cast iron	50mm (2")
Tapping (Optional)	Steel	25mm (1")
	Cast iron	32mm (1 1/4")




RF-720A

RF-1100

Radial Drill

WORKING CAPACITY

Drilling	Steel	42mm (1 2/3")
	Cast iron	55mm (2 3/16")
Tapping (Optional)	Steel	25mm (1")
	Cast iron	38mm (1 1/2")

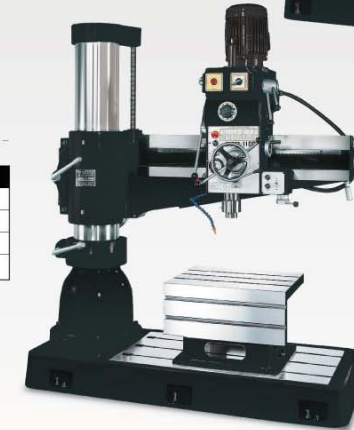

RF-1100

Item	Unit	RF-35	RF-720A	RF-1100
Main Motor	HP	1.5	2	3HP (2 Speed motor)
Speed	1 Speed Motor (standard)	rpm 60Hz 340~3000 50Hz 300~2600	88~1500 (6 speeds)	-
	2 Speed Motor (optional)	rpm 60Hz 170~3000 50Hz 145~2600	-	44~1500 (12 speeds)
Taper		MT3	MT#4	MT#4
Stroke	mm	130	220	230
Travel of Spindle Head	mm	380	530	820
Dimension of Base	mm	-	1260 x 640 x 160	1275 x 715 x 180
Table Size	mm	550 x 500	-	-
Column Diameter	mm	Ø115	Ø210	Ø260
T-slots Size	mm	16 x 26	-	-
Cross Travel	mm	380	-	-
Packing Dimensions	mm (L x W x H)	610 x 890 x 160 (Machine) 965 x 800 x 203 (Stand)	1680 x 826 x 2160	1880 x 864 x 2210
Machine Weight	NW/GW	250 / 280 kgs (Machine) 35 / 36 kgs (Stand) 550 / 614 lbs	1120 / 1250 kgs 2469 / 2756 lbs	1800 / 1950 kgs 3968 / 4299 lbs
No. of Machines Packed in 20' container	20'	36 sets (with stand) / 52 sets (w / o stand)	-	-